

**Description:**

**CAT6 48 Port Panel, 110 Type Termination, 2U, 19" Rack Mountable.**

**Technical Data:**

**Panel**

Material	SECC
Thickness	1.6mm
Plated	Black
Dimension	EIA-310D (2U)

**IDC Connector**

Operating Life	Min. 250 Reterminations
IDC Contact Material	Alloy C2680-H
IDC Thickness	0.8mm
IDC Plating Housing	Tin Plating over Nickel
Plastic Housing	PC+30% Glass-Fiber UL 94V-0
Compability	22-26AWG Solid Wire


**Jack Connector**

Operating Life	Min. 750 Insertions
Contact Material	Phosphor Bronze
Jack Contact Plating	50µ Gold Plated
Jack Plastic Housing	Glass Filled Polyester UL 94V-0

**Printed Circuit Board**

Material	FR4
Thickness	1.6mm

**Performance:**

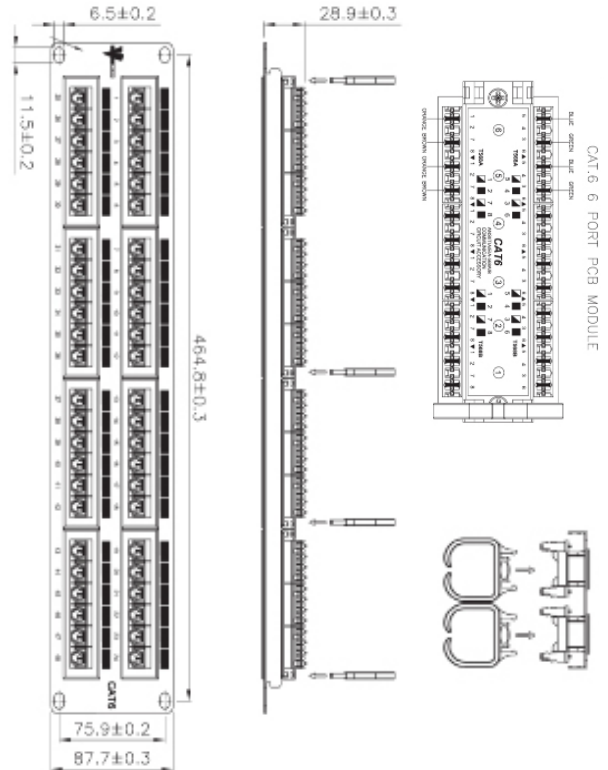

- High Impact Patch Panel
- Tough Black Painted Finish
- Number Labeled for Easy Identification
- Writable & Erasable Marking Surfaces
- 568A & 568B Wiring Color Codes
- Backwards Compatible to Cat5, Cat5E
- 110 IDC Terminals
- ETL Verified to TIA/EIA 568-B.2-1

